
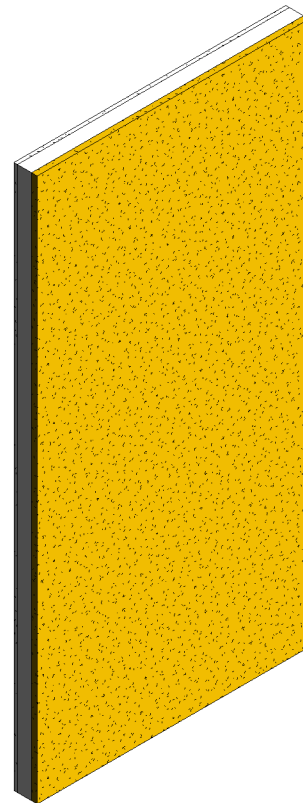


# DensGlass® Shaftliner with DensArmor Plus® Abuse-Resistant Panel

Fiberglass sound insulation thickness is 1" (25.4 mm), 2-1/2" (64 mm) and 3-1/2" (89 mm) for C-T or C-H studs of 2-1/2" (64 mm), 4" (102 mm) and 6" (152 mm) respectively. Finished one side. Components: 1" (25.4 mm) **DensGlass® Shaftliner** panel, C-T or C-H studs and one layer of 5/8" (15.9 mm) **DensArmor Plus® Abuse-Resistant Fireguard®** board installed horizontally for base layer and vertically for face layer. Edges and ends offset 24" (610 mm) o.c.

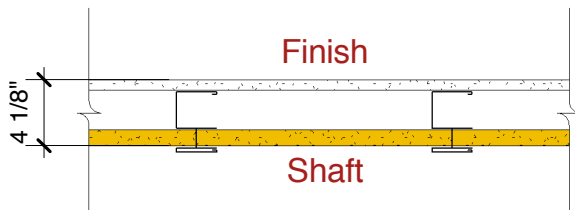

  
**Georgia-Pacific**  
 Gypsum  
 Website: [www.gpgypsum.com](http://www.gpgypsum.com)

**Georgia-Pacific  
 Gypsum**  
 133 Peachtree St.  
 Atlanta, Georgia 30303  
 PH: 1-(800)-225-6119

DensGlass® Shaftliner with DensArmor Plus® Abuse-Resistant Panel

|             |               |                   |
|-------------|---------------|-------------------|
| Assembly:   | V473-05A      | UL V473           |
| Date:       | December 2012 |                   |
| Drawn by:   | JAT           |                   |
| Checked by: | RSS           | Fire Rating: 1 Hr |